


Durable, weatherproof, payment module.

UX300

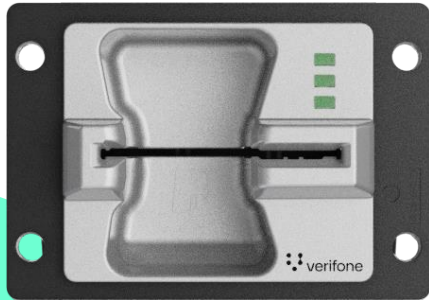

Consider the UX300 card reader/controller your new, most dependable employee. This versatile, self-service solution provides secure and reliable transactions for vending machines, public transportation and other unattended, high-transaction-volume environments. Programmed to read most bank cards, chip cards and magstripe cards, the UX300 hybrid card reader works alone or in combination with UX Series PIN pad and NFC reader options to add more functionality to your self-service environments.

- Weatherproof enclosure provides top-level protection against dust, liquids and other harmful substances, withstanding IP34
- Tamper-resistant design features anti-vandalism enclosure that can withstand an impact of up to 10 Joules, IK09 rating
- Shutter to prevent foreign body insertion
- Designed to easily integrate into existing environments and compatible with many POS host protocols, like ESAI, iECR, ZVT, XPI, VIPA and more
- Pair either the UX100 or UX110 with the UX300 card reader to optimize your transaction functionality
- Proven hybrid card reader technology ensures easy customer guidance
- Wide card slot for easy card acceptance and user experience
- Utilizes the power of Verifone Cloud Services for estate management

Card Reader	Triple track MSR EMVCo Approved Landed smart card
Multimedia	Audio: Buzzer
Memory	384 MB (256 MB Flash, 128 MB SDRAM)
Processor	ARM11 32-bit RISC 400 MHz
Operating System	Embedded Linux with Verifone security enhancements
Connectivity	100 Mbit LAN USB Hosts, RS-232
Physical	150 mm L x 96 mm W x 71 mm H
Mechanical Cutout	73.2 mm x 61.2 mm

Environmental	Operating Temperature: -20° to 70° C (-4° to 158° F) Storage Temperature: -25° to 70° C (-13° to 158° F) Relative Humidity: 10% to 90%, Non-condensing IK09 IP34
Power Supply	12 VDC Power Supply 2 Power-Saving Modes
Security	PCI 5.x Approved
Other Standard Features	Card Slots: 2 SAM Slots Real-time Clock
Optional Features	Contactless Support: With UX400 PIN Support: With UX100 Power Supply 9 VDC-42 VDC Connectivity: MDB, RS-485, 4X USB Host, 2 nd LAN

