


Versatile and compact self-service

UX700

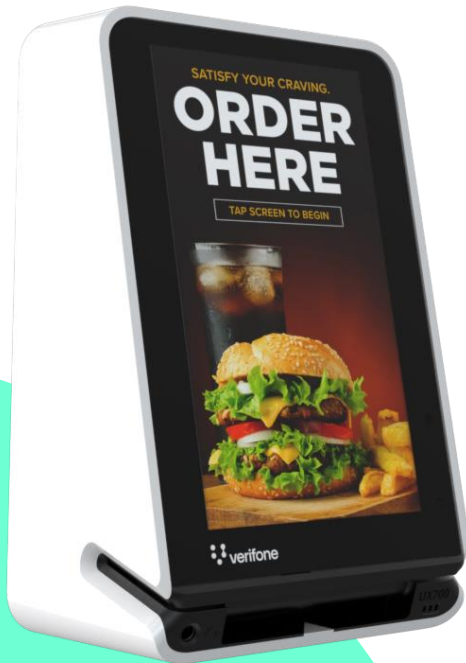

The Verifone UX700 is a full-featured, robust all-in-one unattended payment device utilizing the flexibility of Android OS. This versatile self-service solution provides secure and reliable transactions for vending machines, public transportation and other unattended high-transaction volume environments. Easily accept any payment type, anywhere, including mobile wallets and Advanced Payment Methods.

- Beautifully designed small footprint allows for a variety of use cases
- Designed to easily integrate into existing environments and compatible with many POS host protocols
- Weatherproof enclosure provides top level protection against dust, liquids and other harmful substances, withstanding IP65
- Tamper resistant design features anti vandalism enclosure that can withstand an impact of up to five Joules
- Powerful and secure OS - Verifone's secure version based on Android 10.x
- PCI 6.x approved
- Utilizes the power of Verifone Cloud Services for customization and estate management

Display	5" Color LCD Capacitive Multi-touch Screen LED Backlight Brightness: 800 Nits Resolution 720 x 1280 HD	Memory	2GB RAM + 16GB Flash Micro SD
Multi-media	Buzzer Head-set Jack Microphone Speaker Video & Audio Playback	Operating System	Verifone Secure OS, Engage VOS3 AVOS Based on Android 10
User Interface	Configurable Service Button Touchscreen PIN Entry Verifone Navigator	Processor	ARM Cortex A53, Quad Core, 1.3 GHz
Camera Barcode Scanner	Barcode + OCR + QR Decode Front 2 MP Fixed Focus	Security	PCI 6.x Approved
Card Readers	Landed Smart Card Magstripe ISO 7810, 7811, 7813 Smart Card EMVCo Approved	Connections	2 RS232 3 USB Type-A Extend Connector LAN 10/100 Base-T Multi Drop Bus USB Type-B
Contactless	EMVCo Approved FeliCa MiFare Supports Advanced Payment Methods Supports Major NFC/Contactless Schemes	Power	Low Power Modes Rating 9-43V 2.4-0.5A, 6 Pin Socket
Connectivity	Bluetooth® v4.2 Geolocation Optional 4G CAT 4 Ultra-wideband WiFi 2.4GHz + 5GHz 802.11 a/b/g/n	Physical	70mm (55mm front projection) L × 107mm W × 146mm H Weight 575g Cutout 87mm × 109mm EVA SDM Compliant
		Environmental	IK08 IP65 Operating Temperature: -30° to 70° C (-22° to 158° F) Storage Temperature: -30° to 80° C (-22° to 176° F) Relative Humidity: 5% to 90%, Non-condensing ATEX Approved
		Other Standard Features	Card Slots: 3 SAM Real-time Clock

